


**NOVEX DOME** cameras come in two models: OUTDOOR and INDOOR.

Both models use a high quality 1/4" CCD DSP camera with On-Screen Digital (OSD) menu – more than 470-lines, high-resolution, industrial, color camera (original Hitachi or Sony, made in Japan), with auto-iris, auto-focus, and backlight compensation. The indoor model will be available in two versions: **18x optical zoom/ 8x digital zoom/ 1lux** or **22x optical zoom/ 8x digital/ 0.1lux**. The outdoor model supports **23x zoom/ 10x digital zoom/0.1lux** as well as DAY/NIGHT mode. In night mode the outdoor camera will go into a **higher-resolution, B/W, high sensitivity- low light, 0.01lux, 550-lines** mode. High quality motors provide efficient high and low speed operation without vibration. Auto-home function, 360° continuous pan, proportional zoom control, auto flip, 80 programmable presets with preset title, auto cruise, auto scan; 4 auto tours, storable with 32 preset positions each or 4 patterns recording pan/tilt/zoom operations over 180 seconds each.

Details:

Pan speed	0.5°-140° preset speed: 240°/sec
Tilt speed	0.5°-90° preset speed: 140°/sec
Presets	80
Power supply	camera: 24VAC motor: 12VDC
Consumption	10W
Diameter	152mm
Height	266mm
Weight	2.5kg (9.5kg gross shipping)
Communication	Through RS-485
Compatibility	Compatible with Pelco-P, but can be ordered with other popular PTZ protocols

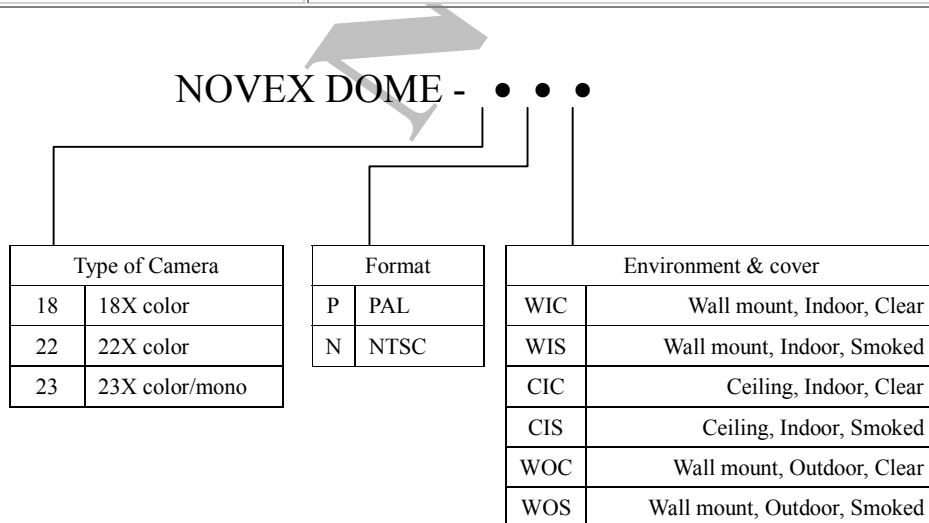

The 18x and 22x are suggested indoor cameras and hence not really recommended to be used with outdoor housing for outdoor applications. The 23x camera is definitely a high-quality, universal, outdoor camera.

**1. Indoor:**

**Ceiling Dome:**



**Wall Mount:**



**2. Outdoor:**

**Wall Mount:**



The outdoor model can come in two different looking domes enclosures. Both have the same functionality and have one more isolation layer than the indoor dome models and are equipped with a heater and cooler fan for anti-mist & anti-ice protection and have a special air circulating design. The housing will have the look as one of the two models shown, depending on availability and pricing.

**3. Indoor, ceiling mount, NOVEX Mini Dome:**



¼" 330,000 Pixel CCD, color 380 TV lines, 14VDC powered, Auto Pan, Preset Sequence (Auto Cruise) Mode Compact, Space-saving Design, High Sensitivity-1.8 Lux, 64 Programmable Presets, Supports Pelco-Coaxitron Transmission, but all supports other popular PTZ protocols; Pan: 0-355°, speed range 5-45°/s, Tilt: 0-90°, speed range 5-45°/s, Consumption1A, Diameter 160mm, Height 120mm, Weight 700g net (gross pack 2.5kg), RS-485;

Optionally the camera can be ordered as **470TV lines with a 2x digital**

	<b>zoom</b>
--	-------------



**WALL MOUNT BRACKET**



**CEILING MOUNT**



**Pole Mount Installation Bracket**



**CORNER MOUNT BRACKET**